

SHANTUI

SPS60-C6 PAVER





Engine model	WP6
Gross power	140kW
Maximum paving thickness	320mm
Maximum paving width	6m

VALUE THAT WORKS

SPS60-C6 TECHNICAL PARAMETERS

CATEGORY	ITEMS	UNIT	SPS60-C6	CATEGORY	ITEMS	UNIT	SPS60-C6	
Dimensions	Full length of whole machine (L)	mm	7260	Hopper	Hopper capacity	T	14	
	Full width of whole machine	mm	6300		Hopper width	mm	3150	
	Full height of whole machine (H)	mm	3950		Hopper depth	mm	2200	
Main performance parameters	Basic paving width	m	2.55	Screw distributing system	Diameter of screw conveyor	mm	420/360	
	Maximum paving width (B)	m	6		Height adjustment	/	Hydraulic	
	Maximum paving thickness	mm	320		Control mode	/	Independent full proportional control of left and right units	
	Theoretical productivity of paving	t/h	750	Automatic leveling device	Material of screw blade	/	High chromium cast iron	
	Flatness	mm/3m	< 2		Contact (brand and country of origin)	/	MOBA	
	Maximum temperature of construction environment	℃	50		Contactless (brand and country of origin)	/	Shantui/MOBA	
	Voltage of electric control system	V	24	Screed plate (brand and country of origin)	/	Shantui		
	Production mode (imported with original packaging, assembled in China, etc.)	/	Assembled in China	Number of rammers and frequency	/	1 /25Hz		
	Engine model	/	WP6	Screeding system	Extension form of screed plate	/	Telescopic at the middle, mechanically assembled on both sides	
Engine type	/	In-line, four-stroke, supercharged intercooled	Heating mode of screed plate		/	Electric		
Engine power	kw/rpm	140	Adjustment mode and range of camber		/	Manual ratchet/hydraulic		
Displacement	L	6.75	Specification and quantity of screed plate extensions available		/	0.5mone for each side		
Emission	/	National-IV	Hydraulic system		Travel pump	Model	/	HPV055
Engine brand	/	Weichai				Country of origin	MPa	China
Maximum output torque of engine	N.m/rpm	761		Hydraulic motor	Model	/	HMF055	
Track width	mm	300			Country of origin	/	China	
Brand and model of reducer	/	Infinity		Hydraulic valve	Model	/	Yinxiang	
Brand and model of travel motor	/	Linde			Country of origin	/	China	
Travel system	Drive mode of tracks	/	Independent full-hydraulic drive of left and right units					
	Brake mode in the absence of oil pressure (parking)	/	Normally-closed travel reducer					
	Travel speed	km/h	0-3					

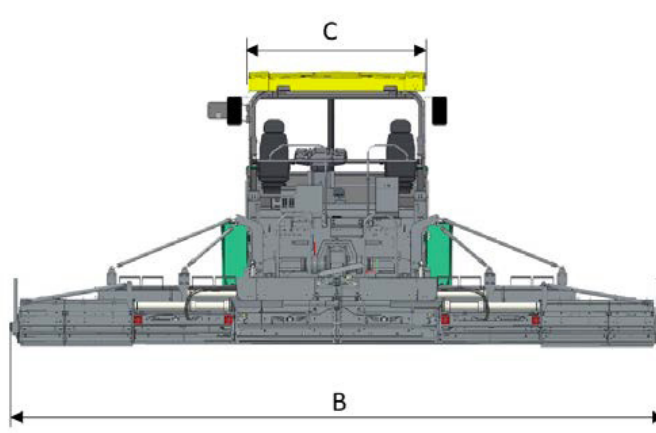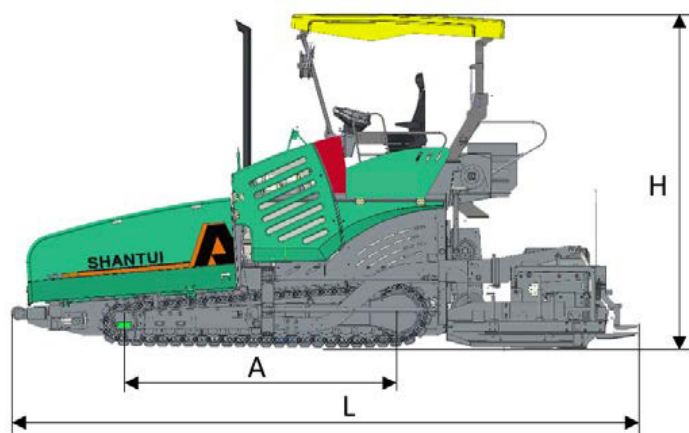

* The specification is subject to change without advance notice. Images may include optional configurations. The actual color and appearance of the product may differ from what is shown in the images.



Shantui Social

SHANTUI CONSTRUCTION MACHINERY CO., LTD.

ADDRESS: NO. 58, NATIONAL HIGHWAY 327, HIGH-TECH ZONE, JINING CITY, SHANDONG PROVINCE, CHINA

TEL: +86-537-2909369 FAX: +86-537-2311219

EMAIL: trade@shantui.com WEBSITE: www.shantui.com

SHANTUI
VALUE THAT WORKS